


Breather Felt

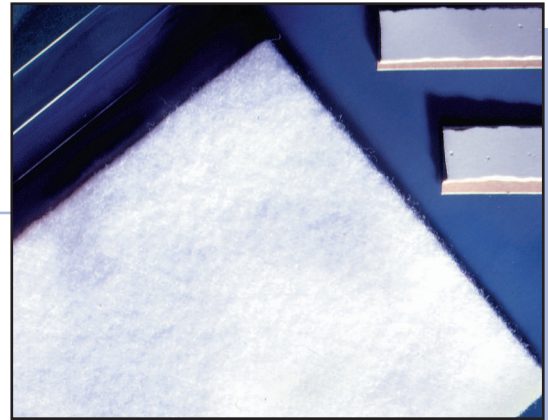

FEATURES

- s Multi-directional stretch and low-density high-loft construction makes it an excellent choice for use as a breather material.
- s Used in autoclaves to wrap entire package to protect bagging film.
- s Used for vacuum assisted hydraulic press as filter and to avoid clogging of the vacuum tube.
- s Available in different quilt thickness and fibre filament to meet your needs.

DESCRIPTION

Made of non-woven quilted felt material with high temperature resistant polyester fiber able to stretch to many contours. Designed for use in autoclaves. Used to wrap the perimeter of a multilayer book to assure air evacuation from all exposed edges of the package and prevent the puncturing of the nylon bagging film.

Available

- s Four different thicknesses 4, 7, 10, 20 (oz/yds²).
- s Operating temperatures up to 400 degrees Fahrenheit (204 degrees Celsius)

Thickness (oz./sq. yds)	REFERENCE TABLE	
	Roll Sizes	
20	60 in x 25 yds (1524 mm x 23 meters)	200 psi
10	60 in x 50 yds (1524 mm x 45 meters)	100 psi
7	60 in x 50 yds (1524 mm x 45 meters)	85 psi
4	60 in x 100 yds (1524 mm x 91 meters)	50 psi

Product Code	RollWidth	Roll Sizes
A3000 4 oz.	60 in (1524 mm)	100 yds
A3000 7 oz.	60 in (1524 mm)	50 yds
A3000FR 4 oz.	60 in (1524 mm)	100 yds
RC3000 10A/15D	60 in (1524 mm)	50 yds
RC3000 10A/FR15D	60 in (1524 mm)	50 yds
RC3000 10/25D	60 in (1524 mm)	50 yds
RC3000 20/25D	60 in (1524 mm)	25 yds
RC3000 20A/15D	60 in (1524 mm)	25 yds
RC3000-10B	60 in (1524 mm)	50 yds
RC3000-20B	60 in (1524 mm)	25 yds
RC3000-20A/15D-1	30 in (762 mm)	25 yds

Note: Call for custom sizes and pricing, quote upon request.

INFORMATION AND PRICING CONTAINED IN THIS DOCUMENT ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

FAX ORDERS AT (949) 583-7007 OR VISIT OUR WEBSITE AT WWW.SDIONLINE.COM
ORDER TOLL FREE IN THE U.S. 1-888-734-7734

